



Pretty
Plastic

building from waste

info@prettyplastic.nl
www.prettyplastic.nl
@we_are_prettyplastic

FIRST ONE PRODUCT SHEET

April 2026

PRODUCT SHEET

PRODUCT NAME FIRST ONE

TECHNICAL DATA

HEIGHT	400 mm
WIDTH	304 mm
THICKNESS	29 mm

NUMBER OF TILES PER M ²	22.2
WEIGHT PER TILE	1.1 kg
WEIGHT PER M ²	24.4 kg

MATERIAL	recycled Polyvinyl chloride (PVC)
----------	-----------------------------------

FLAMMABILITY	
WALL: EN 13501-1:2018	B-s3,d0
ROOF: EN 13501-5	BROOF(t4)

PRODUCTION TOLERANCES	+/-2%
-----------------------	-------

INSTALLATION

Pretty Plastic tiles must be fixed to a wooden substructure made of timber battens. The minimum quality should be C16, with a minimum dimension of 24 × 48 mm. Each tile must be mechanically fixed to the substructure using fasteners suitable for exterior façade use (for example SPAX façade screw, stainless steel A2) - see our Installation Manual for details. Maintain a minimum 2 mm gap between tiles.

PROCESSING

Pretty Plastic can be cut or drilled without splintering.

COLOUR


Pretty Plastic is available in four colours – ochre, terracotta, green and grey – each offered in three shades. The colours shown serve as representative examples and are intended to provide an initial impression only. Due to the inherent characteristics of recycled materials, the actual product may display slight variations in colour and finish.

MAINTENANCE

Pretty Plastic is maintenance-free and can be cleaned using standard household cleaning products.

RETURN & UPCYCLING

Tiles are returnable for reuse or recycling.
Info: prettyplastic.nl

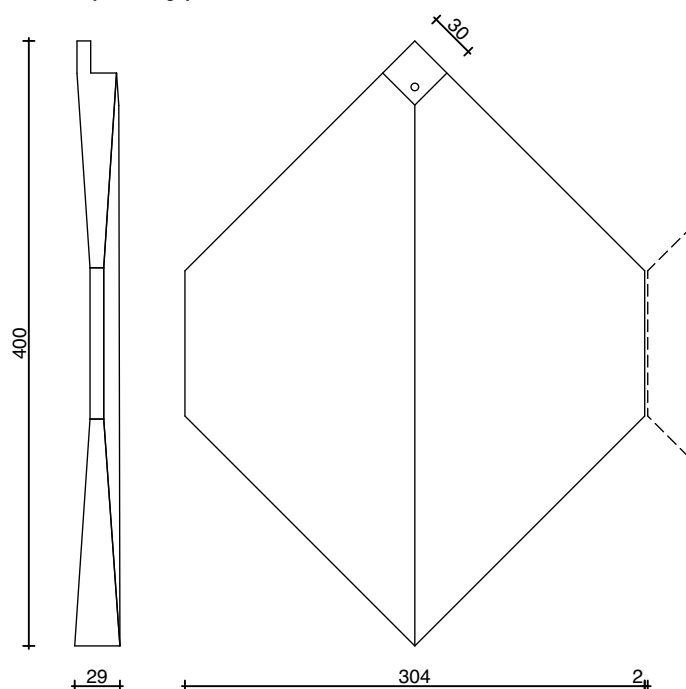

PRODUCT SHEET

PRODUCT NAME FIRST ONE

	DARK	MEDIUM	LIGHT
GREY	 B3	 B2	 B1
GREEN	 G3	 G2	 G1
TERRACOTTA	 T3	 T2	 T1
OCHRE	 O3	 O2	 O1

PRODUCT SHEET

PRODUCT NAME FIRST ONE

 **Pretty Plastic**
building from waste



260401 V6